

NEPTUNE 6500 INDICATOR

CHECKWEIGH DIGITAL INDICATORS



The NEPTUNE-6500 indicator is built tough to meet the demanding requirements of harsh conditions for tough washdown environments and corrosive chemical industries. Under - Accept -Over annunciators make high speed check weighing easy. A beeper is included standard to add versatility. Large easy-to-read, bright green, one inch tall digits ensure maximize operator visibility and minimize fatigue while maintaining high product throughput. Polished, 304 stainless steel construction provides high durability and a long term attractive sanitary appearance. A full numeric keyboard and 100 part number memory for set point data make this indicator the leader in check weighing value.

NEPTUNE 6500 INDICATOR

CHECK WEIGH DIGITAL INDICATOR

STANDARD FEATURES & BENEFITS

◆ HIGH SPEED OPERATIONS:


- At thirty updates per second, zero to target and back to zero ensures maximum throughput and productivity
- ◆ **Four units of measure:** pushbutton select to read in pounds, ounces, pound - ounce, kilograms.
- ◆ **Check weigh annunciators:** amber/under, green/accept, red/over
- ◆ **Internal beeper for audible alert**
- ◆ **Full numeric keypad and 100 part number memory:** allows storage of 6 digit part number with setpoint data for fast and easy switching between products

- ◆ **Serial RS232C Data Output:** This bi-directional port is switchable for interface to a printer, remote display or computer at 1200-9600 baud.
- ◆ **Complete Print Format:** Contains gross weight, OVER or UNDER indication, time, date and ticket number.
- ◆ **Time and Date Memory Standard**
- ◆ **Digital Keyboard Calibration**
- ◆ **1 Year Warranty**
- ◆ **3 - 5 Volt TTL Setpoint Outputs**

Specifications:

Load Cell Excitation: +10 VDC
Load Cell Current: Drives up to four 350W Load Cells
Display Update Rate: 8 Per Second
A/D Resolution: Up to 260,000 Internal Counts
Display: 6 Digits Plus Sign, 1" High, 7 Segment Light Emitting Diode Display
Display Resolution: Up to 50,000 External Grads, Selectable
Key Functions: Units, Zero, Net/Gross, Tare, Print
Serial Port: Full Duplex RS-232 Format

Annunciators: Gross, Net, kg, lb, Center of Zero, Stable, Tare, Negative, PCS
Power Requirements: 117 VAC - 50/60 Hz at 0.5 Amp
- Optional: Line Power 220 VAC - 50/60 Hz at 0.25 Amp
DC Power Consumption: 200 mA + 30 mA/350W Load Cell
Operating Temperature: 14°F to 104°F (-10°C to 40°C)
Overall dimensions: 10" x 3" x 6"
Warranty: 1 Year Warranty

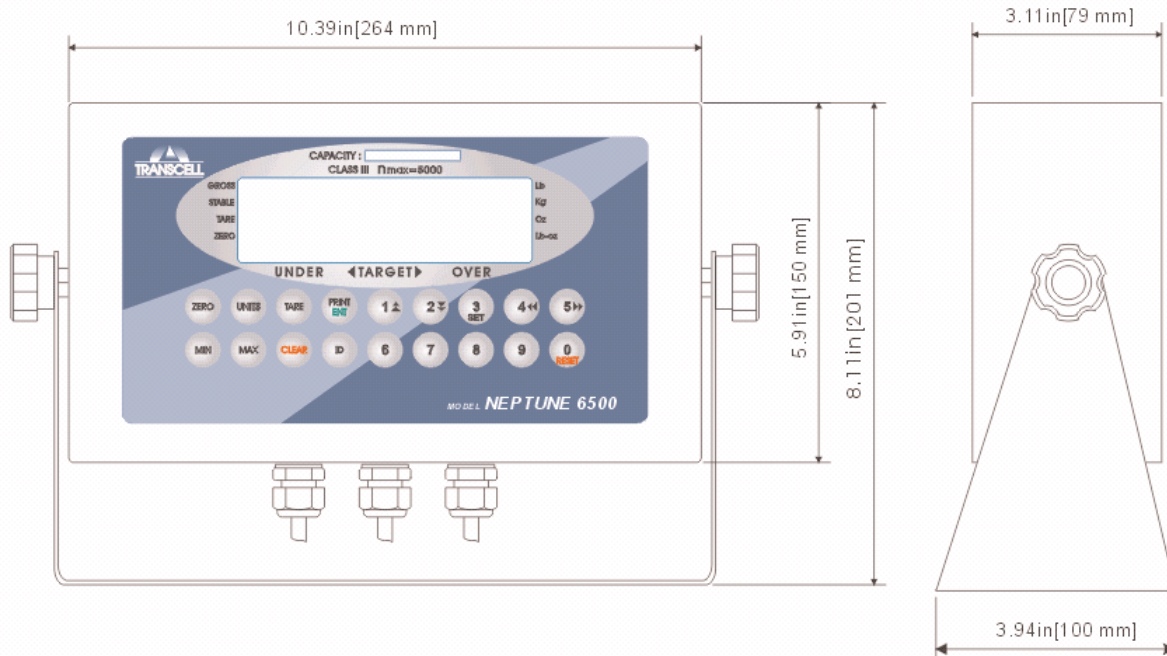

SOLD BY:



**Universal
Scale
Service**

7980 Mill Station Rd
Sebastopol, CA 95472
Ph : (707) 829-8482
(800) 578-7948
Fx : (707) 829-3925