

Intercomp CS™ 1500



Approvals



Standard Features

- Digital calibration
- Auto shut-off
- NEMA 4 cast aluminum case
- 0.8" LED digital readout
- Recessed push-button switch
- Powered by 8 "D" cell batteries
- Infrared remote control
- NTEP on all capacities

Specifications

RESOLUTION:

20 bit A/D delivers over 1,000,000 internal counts

CONTROLS:

Zero, lb/kg, On, Off, Tare, Print, Mode and Set

DISPLAY:

0.8" (20 mm) 5 1/2" LED

INDICATORS:

lb/kg, Gross, Net, Total, and Peak Hold

POWER:

(Batteries are not included) 8 "D" size disposable alkaline dry cells or rechargeable nickel-cadmium cells
Battery life up to 100 hours continuous use

ENCLOSURE:

NEMA 4 cast aluminum case

HOOK OR EYE:

Crosby-Laughlin or equivalent

APPROVALS:

NTEP-certified per H-44, Class III, 3000d; Class III, 5000d, CC# 97-135A3
CE

AUTO SHUT-OFF:

Low battery, or after 5 minutes without use

ACCURACY:

±0.1% of reading

TEMPERATURE:

Operating -4°F to 140°F (-20°C to 60°C)

NOMINAL OVERLOAD:


200% of capacity

MAXIMUM OVERLOAD:

500% of capacity

WARRANTY:

1-year limited warranty

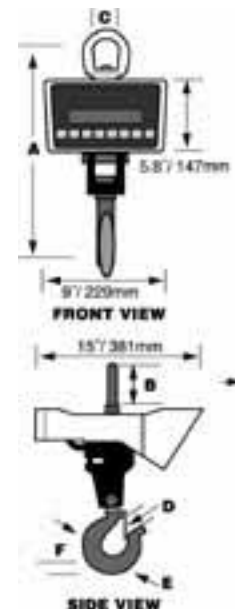

PART#	CAPACITY	GRADUATION	A	B	C	D	E	F	EST. SHIP WEIGHT
82447	300 lb	0.1 lb	10.5 in	2.38 in	2 in	0.97 in	1.38 in	0.84 in	20 lb
	(150 kg)	(0.05 kg)	(267mm)	(61mm)	(51 mm)	(25 mm)	(35 mm)	(22 mm)	(9 kg)
82448	500 lb	0.2 lb	10.5 in	2.38 in	2 in	0.97 in	1.38 in	0.84 in	20 lb
	(250 kg)	(0.1 kg)	(267 mm)	(61 mm)	(51 mm)	(25 mm)	(35 mm)	(22 mm)	(9 kg)
43647	1000 lb	0.5 lb	10.5 in	2.38 in	2 in	0.97 in	1.38 in	0.84 in	20 lb
	(500 kg)	(0.2 kg)	(267 mm)	(61 mm)	(51 mm)	(25 mm)	(35 mm)	(22 mm)	(9 kg)
43648	2000 lb	1 lb	11.5 in	2.38 in	2 in	0.97 in	1.38 in	0.84 in	20 lb
	(1000 kg)	(0.5 kg)	(292 mm)	(61 mm)	(51 mm)	(25 mm)	(35 mm)	(22 mm)	(9 kg)
43649	5000 lb	2 lb	19 in	2.88 in	2.25 in	1.69 in	2.5 in	1.82 in	36 lb
	(2500 kg)	(1 kg)	(482 mm)	(73 mm)	(57 mm)	(43 mm)	(64 mm)	(46 mm)	(16 kg)
43650	10000 lb	5 lb	19 in	2.88 in	2.25 in	1.69 in	2.5 in	1.82 in	36 lb
	(5000 kg)	(2 kg)	(482 mm)	(73 mm)	(57 mm)	(43 mm)	(64 mm)	(46 mm)	(16 kg)
43651	20000 lb	10 lb	23 in	3.5 in	3.12 in	2.41 in	3.25 in	2.6 in	45 lb
	(10000 kg)	(5 kg)	(584 mm)	(90 kg)	(80 mm)	(62 mm)	(83 mm)	(66 mm)	(20 kg)

Specifications subject to change without notice